

### Product Information

|                  |                       |  |                                                                      |                  |
|------------------|-----------------------|--|----------------------------------------------------------------------|------------------|
| Norm             | EN ISO 26986          |  |                                                                      |                  |
| Intensity of use | ISO 10874 (EN 685)    |  | 23 Domestic heavy<br>32 Commercial general<br>41 Industrial moderate | class            |
| Total Thickness  | EN ISO 24346 (EN 428) |  | 2,00                                                                 | mm               |
| Wearlayer        | EN ISO 24340 (EN 429) |  | 0,50                                                                 | mm               |
| Abrasion group   | EN 660-2              |  | T                                                                    | class            |
| Total weight     | EN ISO 23997 (EN 430) |  | 1600                                                                 | g/m <sup>2</sup> |
| Standard width   | EN ISO 24341 (EN 426) |  | 2 - 3 - 4                                                            | m                |
| Standard length  | EN ISO 24341 (EN 426) |  | +/- 30                                                               | m                |

### Technical Information

|                                                      |                         |  |           |                    |
|------------------------------------------------------|-------------------------|--|-----------|--------------------|
| Dimensional stability                                | EN ISO 23999 (EN 434)   |  | ≤ 0,40    | %                  |
| Curling                                              | EN ISO 23999            |  | ≤ 8       | mm                 |
| Light stability                                      | EN ISO 105 B02          |  | ≥ 6       | degree             |
| Residual indentation                                 | EN ISO 24343-1 (EN 433) |  | ≤ 0,20    | mm                 |
| Impact sound improvement                             | EN ISO 717/2            |  | Δ Lw 10   | dB                 |
| Dynamic coefficient of friction                      | EN 13893                |  | > 0,6     |                    |
| Slip resistance (ramp test with oil)                 | DIN 51130               |  | R10       | scale              |
| Reaction to fire<br>Report number ---- VNLf 031380.4 | EN 13501-1              |  | Bfl-s1    | class              |
| Underfloor heating                                   | EN 12667                |  | Suitable  |                    |
| Thermal resistance                                   | ISO 8302                |  | 0,015     | m <sup>2</sup> K/w |
| Thermal conductivity                                 | EN 12524                |  | 0,13      | W/m.K              |
| Chemical resistance                                  | ISO 26987 (EN 423)      |  | resistant |                    |
| Static Electrical Propensity                         | EN 1815                 |  | < 2kV     | On concrete        |

### Environment



100% Recyclable.

- No heavy metals
- No solvents
- No Formaldehydes
- No harmful plasticizers

This is illustrative by the choice of raw materials, of partners, of transport and of fabrication processes. Our selection of core materials is based on a combination of our clients' requirements for a quality product as well as requirements for a minimal impact on the environment. We are the leaders in terms of the implementation of clean renewable energy sources and we actively work towards the constant improvement of energy saving.



**E1**  
APPROVED FOR EMISSIONS  
E1 means that the level of formaldehyde is inferior to 0.1ppm (= 0.12 mg/m<sup>3</sup> of air)



Our products are classified as **A+** for the emission of volatile substances in inside air (compulsive sanitary labelling in France since January 2012)



**100% phthalate free**  
\*for all products produced from May 2017 onwards





ISO 9001 - ISO 14001  
**BUREAU VERITAS**  
Certification



### Product Build

1. PU Lacquer
2. Wear layer
3. Design layer
4. Foam layer
5. Impregnation layer
6. Glass fibre interlayer
7. Backing

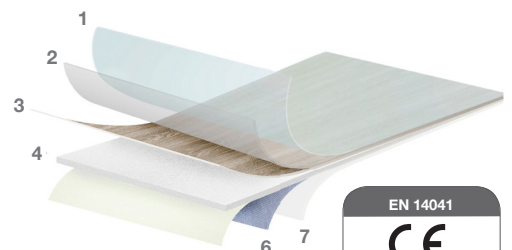

### Features

Thickness: 2,00 mm | Wear Layer: 0,50 mm



RESIDENTIAL COMMERCIAL