


griptex

Griptex is a warm and comfortable slip resistant vinyl flooring that is specifically designed for housing & renovation



2256 Opera Medium
Repeat: 1000mm x 1000mm




2258 Hudson Grey
Repeat: 1333mm x 1000mm




2260 Empire Dark Brown
Repeat: 1333mm x 1000mm




2266 Empire Grey
Repeat: 1333mm x 1000mm



2265 Savannah Clear
Repeat: 1000mm x 1000mm




2264 Savannah Medium
Repeat: 1000mm x 1000mm




2263 Savannah Sand
Repeat: 1000mm x 1000mm



1237 Cajou Sun
Repeat: 1000mm x 1000mm




1104 Cajou Nut
Repeat: 1000mm x 1000mm




2262 Lux Brown
Repeat: 1333mm x 2000mm




0405 Chene Medium
Repeat: 1000mm x 1000mm



2261 Shade Dark Grey
Repeat: 1000mm x 1000mm



2259 Shade Medium Grey
Repeat: 1000mm x 1000mm



2257 Shade Light
Repeat: 1000mm x 1000mm



1284 Verone Light Grey
Repeat: 1000mm x 1000mm



0836 Verone Grey
Repeat: 1000mm x 1000mm




0873 Offset Beige
Repeat: 1000mm x 1000mm



1205 Oxyd Anthracite
Repeat: 1000mm x 1000mm



0447 Cassiopee Grass
Repeat: 500mm x 500mm



0496 Ardoise Black
Repeat: 1000mm x 1000mm



Slip resistant surface
R10



Sound insulating for a quieter home



Durable 0.35mm wearlayer that keeps the floor looking great



Looselay*
*no glue up to 35m²



Easy to clean pureclean PU surface that doesn't trap dirt



Waterproof for extra hygiene



Quick and easy to fit over most existing smooth floor coverings



Direct laying on tiles*
*under certain conditions



Warm and comfortable underfoot



Absorbs unevenness of existing floor



Tough interlayer that resists stretching and warping




Low potential for slip


griptex Residential Safety Flooring

Griptex is a tough vinyl flooring with a unique patented textile backing system that offers outstanding warmth and comfort underfoot. Griptex is safer, quieter and hygienic with an easy to clean surface. Available in a range of stunning modern designs and colourways that can be used in any room in your home.

Technical Characteristics

Total thickness	EN ISO24346	2.90 mm
Thickness of the wearlayer	EN ISO24340	0.35 mm
Weight	EN ISO23997	2000 g/sqm
Width of sheet	EN ISO24341	2m / 3m / 4m
Length of sheet	EN ISO24341	± 25 ml
Backing	–	Polyester (GFT)
European Classification	EN 685	23-32
Fire rating	EN 13 501-1	Cfl-s1
Slip resistance: wet	DIN 51130	R10 rating
Slip resistance: pendulum test	BS 7976-2	≥ 36 PTV
Surface roughness	R _{tm} / R _z	> 0.20um
Abrasion resistance	EN 660-2	Group T
Sound insulation	EN ISO 717-2	16dB
Surface treatment	–	pureclean GripX
Colour fastness	EN 20 105-B02	> 6°
Warranty residential use	–	12 years
CE	EN 14041	

Features and Benefits

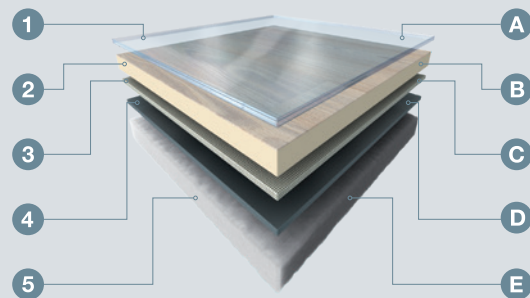

- 1 Wearlayer and protective varnish - pureclean GripX finish
- 2 Realistic embossed design layer
- 3 Fibreglass interlayer
- 4 Exclusive compact stability layer
- 5 Innovative GFT backing
- A Toughness, durability, stain resistance
- B Print quality, realism, diversity
- C Product Strength
- D Even flooring despite unevenness of the floor
- E Acoustic comfort and can be loose laid



GFT is a patented backing system from Gerflor, made from more than 95% recycled plastic bottles. It has many benefits including more warmth and comfort underfoot, sound deadening qualities and it can be laid over most existing floors by evening out small imperfections in the sub-floor - Unroll... it's done!

100% recyclable, looselay technology reducing the need for adhesive and minimal sub-floor preparation.

1m² =
griptex



Recycled technical fibre backing made up of plastic bottles.



UNITED KINGDOM: Gerflor Ltd
Park Green, Macclesfield,
Cheshire, SK11 7LZ
Tel: 03332 412901
E-mail: contractuk@gerflor.com
Visit: www.gerflor.co.uk

IRELAND: Gerflor Ltd
Ballybay Road, Carrickmacross,
Co. Monaghan, Republic of Ireland
Tel: +353 (0) 42 966 1431
E-mail: gerflorirl@gerflor.com
Visit: www.gerflor.ie

Gerflor[®]
theflooringgroup